

FC-SERIES & MC-SERIES RIDGE VENTS




AGRI-AIDE FC-Series and MC-Series ridge vents (roof cupolas) effectively provide fresh air in the attic or loft area of naturally ventilated animal confinement buildings. All-weather construction in molded white fiberglass-reinforced composite or cost-effective wood and galvanized steel with baked white enamel finish makes these roof cupolas an attractive addition to any building. Plastic screens over air passages prevent bird entry and snow ledges, featured in both ridge vent series, resists the entry of snow or wind-blown rain.

FC-Series ridge vents feature fully corrosion-resistant fiberglass construction making them suitable as either an air inlet or air outlet. As an air outlet (for example, in buildings without attics that use natural summertime ventilation), heated barn air can naturally rise and vent out through the roof. Corrosion-resistant construction is important because such air carries a high concentration of moisture and corrosive gases. As an air inlet for buildings with negative pressure ventilation, wintertime fresh air can enter the attic area and temper before reaching animal level. An optional damper kit is available to control exhaust or intake rates.

MC-Series ridge vents provide an inexpensive yet effective way to provide attic or loft air.

MC-Series

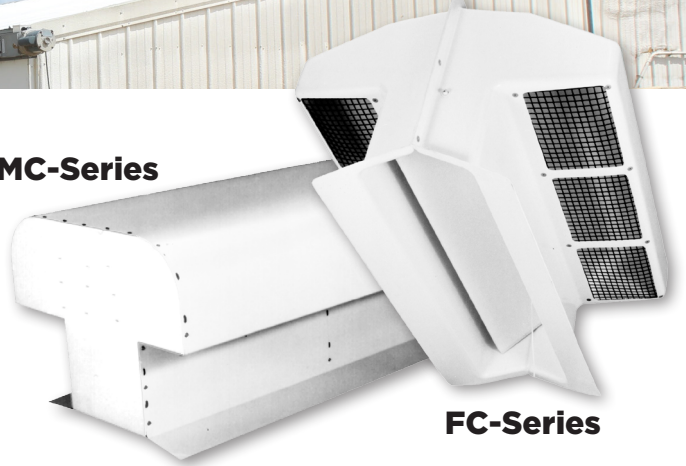

FC-Series

AGRI-AIDE® FIBERGLASS ROOF CUPOLA

Catalog Number	Application	Overall Dimensions L x W x H		Rough Opening L x W		Shipping Weight		Max Airflow
		in	mm	in	mm	lbs	kg	CFM
FV-FC3000	Intake or Exhaust	50 x 36 x 25.75	1270 x 914 x 654	46 x 12	1168 x 305	40	18.1	3000

Optional adjustable insulated damper kit (KV-FC3100) also available. Contact Osborne for ordering information.

AGRI-AIDE® METAL/WOOD ROOF CUPOLAS

Catalog Number	Application	Overall Dimensions L x W x H		Rough Opening L x W		Shipping Weight		Max Airflow
		in	mm	in	mm	lbs	kg	CFM
FV-MC1224	Intake	24 x 25 x 18.25	610 x 635 x 464	22.5 x 12	527 x 305	30	13.6	1500
FV-MC1248	Intake	48 x 25 x 18.25	1219 x 635 x 464	46.5 x 12	1181 x 305	49	22.2	3000
FV-MC1272	Intake	72 x 25 x 18.25	1829 x 635 x 464	70.5 x 12	1791 x 305	71	32.2	4500
FV-MC1296	Intake	96 x 25 x 18.25	2438 x 635 x 464	94.5 x 12	2400 x 305	87	39.5	6000